

BC200

Power Supply/Battery Enclosure

Altronix BC200 is a UL Recognized NEMA 1 Rated power supply/battery enclosure that can accommodate a wide variety of Altronix power supplies, sub-assemblies, and accessories. Altronix enclosures feature ample knockouts that are suitable for 0.5" or 0.75" conduits.



BC200



BC200 with optional 12VDC/7AH battery

Specifications

Features

- 18 Gauge steel enclosure.
- Ample knockouts accommodating either 0.5" or 0.75" conduits for convenient access
- Includes battery/component shelf, camlock and two self-tapping screws to secure door

Capacity

- Enclosure accommodates one (1) 12VDC/7AH or two (2) 12VDC/4AH batteries

Agency Listings

Component Enclosure USR, CNR:
UL Recognized

Physical and Environmental

Dimensions (H x W x D)

Enclosure:
12.25" x 7.25" x 4.5" (311.2mm x 184.2mm x 114.3mm)

Shipping:
13" x 10" x 7" (330.2mm x 254mm x 177.8mm)

Weight (approx.)

Product: 6.45 lb. (2.93 kg)

Shipping: 7.25 lb. (3.29 kg)

Accessories (order separately)



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our enclosures.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution


Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.

BC200

Power Supply/Battery Enclosure

Product Position Chart for the Following Models:

Altronix Products	Mounting
Power Supply/Chargers: AL300ULXB, AL400ULXB2, AL600ULXB, AL1012ULXB, AL1024ULXB2, eFlow3NB, eFlow4NB, eFlow6NB, eFlow102NB, eFlow104NB, eFlow15UB, Tango1B POE75, POE201, POE240, POE360, POE367, OLS75, OLS120, OLS120D2, OLS180, OLS200, OLS250, OLS350 (220VAC Input power supplychargers are also accommodated)	(A)
Sub-Assemblies: ACM8(CB), ACMS8(CB), ACMS12(CB), LINQ8ACM(CB)	
AL175ULB, AL176ULB, AL201ULB, ACM4(CB), LINQ8PD(CB), MOM5, PD4UL(CB), PD8UL(CB), PD16W(CB), PDS8(CB), PDS16(CB), NetWay5A, NetWay5B, NetWay5BT(Q), NetWay5P(Q), NetWay5ES(Q), VR6, VR10	(B)
T1618300, T2428300, T2428300220, T2428300277	(C)
T1224150, T2428175	(D)
T1250, T12100, T16100, T1618100	(E)

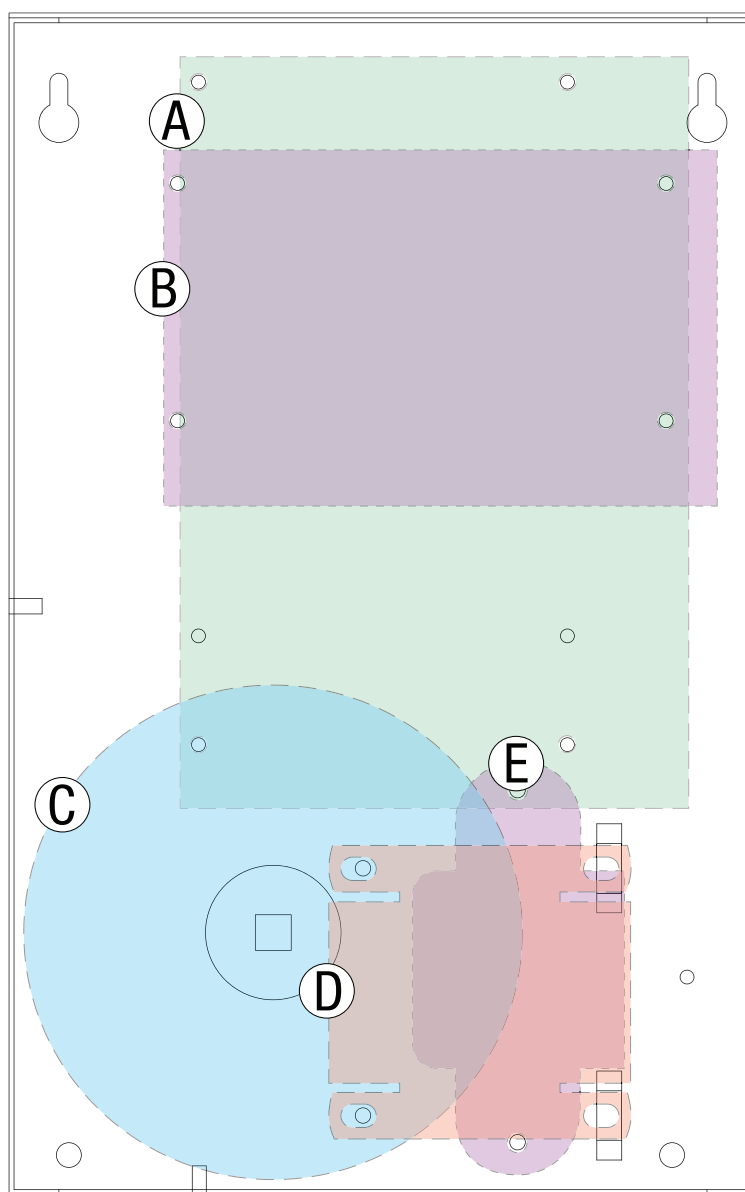

Dimensions and Drawing

Dimensions (H x W x D approximate)

12.25" x 7.25" x 4.5" (311.2mm x 184.2mm x 114.3mm)

